


**Gromstrip** is a continuous length of extruded U-channel for use as a protective covering on sharp edges. It can be cut to desired length and inserted into any hole, regardless of configuration. Gromstrip requires minimum space, grips surfaces snugly, and won't jar loose. Wherever wires pass through a metal piece, Gromstrip used on the sharp edges will protect against fraying and cut-through of the wires. Gromstrip is also available with continuous serrations for use in acute angles or other difficult applications. (On angles less than 90°, miter the two outside edges for a better fit.)

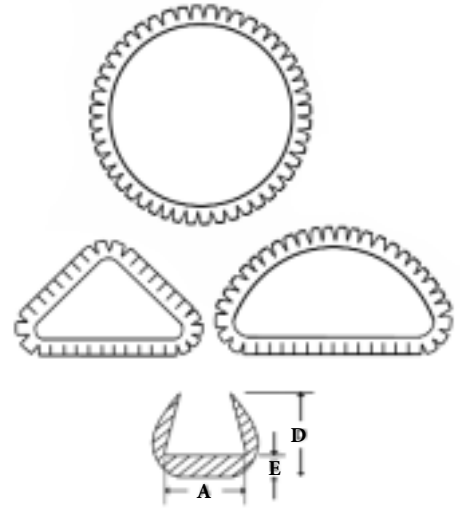

**Polyethylene** - used for general application.

Standard color for both Polyethylene and Nylon is natural.

Polyethylene Catalog Number Size	Serrated Polyethylene Catalog Number Size	Dimensions*						Panel Thickness	
		A		D		E		inches	mm
		inches	mm	inches	mm	inches	mm		
	FG-036-NA	0.031	0.79	0.125	3.18	0.031	0.79	To 0.036	To 0.91
	FG-071-NA	0.109	2.77	0.172	4.37	0.031	0.79	0.037-0.071	0.94-1.80
	FG-164-NA	0.156	3.96	0.188	4.78	0.047	1.19	0.106-0.164	2.69-4.17
	FG-187-NA	0.188	4.78	0.188	4.78	0.047	1.19	0.165-0.187	4.19-4.75
	FG-250-NA	0.250	6.35	0.188	4.78	0.047	1.19	0.188-0.250	4.78-6.35

\* Tolerance: 0.010 in. (0.25 mm)



**Gromstrip**

***Gromstrip** This product can be cut to desired lengths and inserted into any hole, regardless of configuration. Gromstrip requires minimum space, grips surfaces snugly, and won't jar loose. Wherever wires pass through a metal piece, Gromstrip used on the sharp edges will protect against fraying and cut-through of the wires.*